




pelican systems

econotile

Supply and install Pelican econotile foil back ceiling tiles with (White) or (Fissured) or (Black) vinyl face finish, size (600 x 600 x 9) or (600 x 1200 x 9) laid on Pelican econogrid Exposed Suspension Ceiling Grid System with pre-painted white capping, ceiling perimeter to be finished with pre-painted (Standard) or (Shadowline) Wall Trim. Hold down clips may be used to hold the ceiling tiles firmly in position. Suspension shall be in accordance with the manufacturer's recommendations and to include all necessary Hangers, Sub Grid and Fixings.

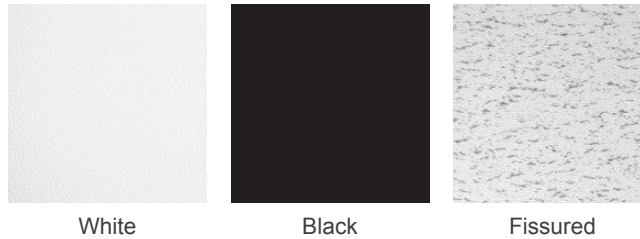

White

Black

Fissured

Fire Performance Classification for Buildings: SANS 428:2012 (10177-5 & 10177-10)

The econotile ceiling system as tested did not propagate flaming during the standard SANS 10177-10 test.

The material is classified as combustible in terms of SANS 10177-5:2012.

The overall classification of econotile in terms of the SANS specification is therefore: CLASS B/B1/2

***NOTE:** All ceilings should be installed in accordance with the current code of practice for ceiling installation adopted by the South African Building Interior System Association (SABISA). Care should be taken to ensure that the fixing used for the suspension points should be able to support a safety factor of three times the design load of the ceiling. Suspended ceilings are not designed to take the weight of services personnel walking around on its surface. The ceiling erection should take place at a later stage in the building contract when the area is clean and there is less likelihood of damage from other trades and exposure to the elements.

All installations to be done in accordance with SABISA guidelines.

Specifications are available on Autospec and our website.